1989

NASA/ASEE SUMMER FACULTY RESEARCH PROGRAM

Marshall Space Flight Center
The University of Alabama in Huntsville

RADAR TRANSPONDER ANTENNA PATTERN
ANALYSIS FOR THE SPACE SHUTTLE

Prepared by: Roger Radcliff

Academic Rank: Associate Professor

Affiliation: Dept. of Electrical and
                                Computer Engineering
                                Ohio University
                                Athens, Ohio

NASA/MSFC:

    Laboratory: Information and
                                Electronics Systems

    Division: Computers and
                                Communications

    Branch: Communications Systems

NASA Colleague: Lee Malone

Date: August 25, 1989

RADAR TRANSPONDER ANTENNA PATTERN
ANALYSIS FOR THE SPACE SHUTTLE

Roger Radcliff
Associate Professor of Electrical
and Computer Engineering
Ohio University
Athens, Ohio

ABSTRACT

In order to improve tracking capability, radar
transponder antennas will soon be mounted on the shuttle
solid rocket boosters (SRB). These four antennas, each
being identical cavity-backed helices operating at 5.765
GHz, will be mounted near the top of the SRB's, adjacent
to the intertank portion of the external tank. The purpose
of this study is to calculate the roll-plane pattern (the
plane perpendicular to the SRB axes and containing the
antennas) in the presence of this complex electromagnetic
environment.

The large electrical size of this problem mandates an
optical (asymptotic) approach. Development of a specific
code for this application is beyond the scope of a summer
fellowship; thus a general purpose code, the Numerical
Electromagnetics Code - Basic Scattering Code, was chosen
as the computational tool. This code is based on the
modern Geometrical Theory of Diffraction, and allows
computation of scattering of bodies composed of canonical
problems such as plates and elliptic cylinders.

Apertures mounted on a curved surface (the SRB) cannot
be accommodated by the code, so an antenna model
consisting of wires excited by a method of moments current
input was devised that approximated the actual performance
of the antennas. The improvised antenna model matched well
with measurements taken at the MSFC range. The SRB's, the
external tank, and the shuttle nose were modeled as
circular cylinders, and the code was able to produce what
is thought to be a reasonable roll-plane pattern.

ACKNOWLEDGEMENTS

INTRODUCTION

In order to improve tracking of the shuttle's solid
rocket boosters (SRB) after normal separation from the
external tank (or in the event of abnormal separation),
four radar transponder antennas will be mounted on the
SRB's. The antennas are cavity-backed helices operating
at a frequency of 5.765 GHz, and a pair them will be
mounted on opposite sides of each SRB cylinder.

The patterns of two of these antennas mounted on a
metallic cylinder having the same diameter as an SRB but
only 4.5 feet tall have been measured at the MSFC antenna
range and they appear to yield acceptable coverage. An
attempt to measure the three-dimensional pattern of the
antennas in the presence of both SRB's, the external tank
(ET), and the orbiter is not practical, since the
frequency of operation needed for a usable shuttle scale
model is in the neighborhood of 90 GHz.

The purpose of this effort is to gain more information
on the pattern of these antennas in the presence of the
entire shuttle cluster. Since experimental means are not
practical, classical electromagnetic theory along with
modern computational methods will be used. Given the time
restraints of a ten-week fellowship, the pattern is
calculated in only one plane (the plane containing the
antennas and which is perpendicular to the SRB axes).

OBJECTIVES

The objective of this effort is to calculate the two-dimensional pattern of the four radar transponder antennas in the presence of both SRB's, the ET, and the orbiter. The plane of interest is the plane containing the four antennas, which happens to be perpendicular to the SRB cylinder axis (and will henceforth be referred to as the "roll-plane" pattern). Specific attention will be given to accurate modeling of the antennas performance and matching model results to actual measurements.

The following assumptions are make throughout the report:

1. Portions of the shuttle cluster that do not penetrate the roll-plane are not included in the computations. This implies that the effects, if any, of the rounded ends of the SRB's, ET, and orbiter are ignored.

2. Polarization measurements were not made, but it is assumed that the radiation is circularly polarized.

3. The antennas will be placed at points on the SRB's that are adjacent to the intertank portion of the ET. This intertank section contains strengthening corrugations which are on the order of a wavelength high. In this analysis, the ET is assumed to be a smooth cylinder.

PATTERN CALCULATION

The locations for the radar transponder antennas on the
shuttle cluster are shown in Fig. 1. The antennas are
assumed to be operating at a frequency of 5.765 GHz and
that the radiation is circularly polarized. Due to the
symmetry of the problem and the fact that objects not in
the roll-plane are being ignored, it is irrelevant whether
the cluster is looked upon from the front or rear (this is
why the direction of flight is not identified on cluster
drawings in Figs. 7-10).

Previous to this effort, an estimate of the shadowing
due to the cluster was made using a line-of-sight
shadowing code [1]-[2]. In addition, some preliminary work
was done to model the antennas in the presence of two
cylinders [3], and the effects of corrugations of the
external tank were partially examined [4]. The roll-plane
pattern of all antennas in the presence of the entire
cluster was not obtained, however.

Due to the large electrical size of the problem, we are
forced to use an optics approach. The integral equation
and differential equation methods require far too much
computer memory and time for a problem of this size [5].
Physical optics could be applied, but there is no general
purpose physical optics code in the public domain, and
writing one for this specific purpose is beyond the scope
of a summer fellowship. Thus, the only technique within
our grasp is geometrical optics and the associated
Geometrical Theory of Diffraction (GTD).

The modern GTD is an extension of Keller's diffraction
theory. It modifies the geometrical optics field (direct,
reflected, and refracted fields) to yield a field
distribution which is continuous across spatial boundaries
at which geometrical optics alone would predict
discontinuities. It is a high-frequency asymptotic
technique, however, and becomes more accurate as the
frequency of operation becomes higher. Given the radar
antenna wavelength and the size of the shuttle cluster,
GTD can be expected to give good results for this
problem.

Invoking GTD requires development of "diffraction
coefficients" associated with the given problem [6].
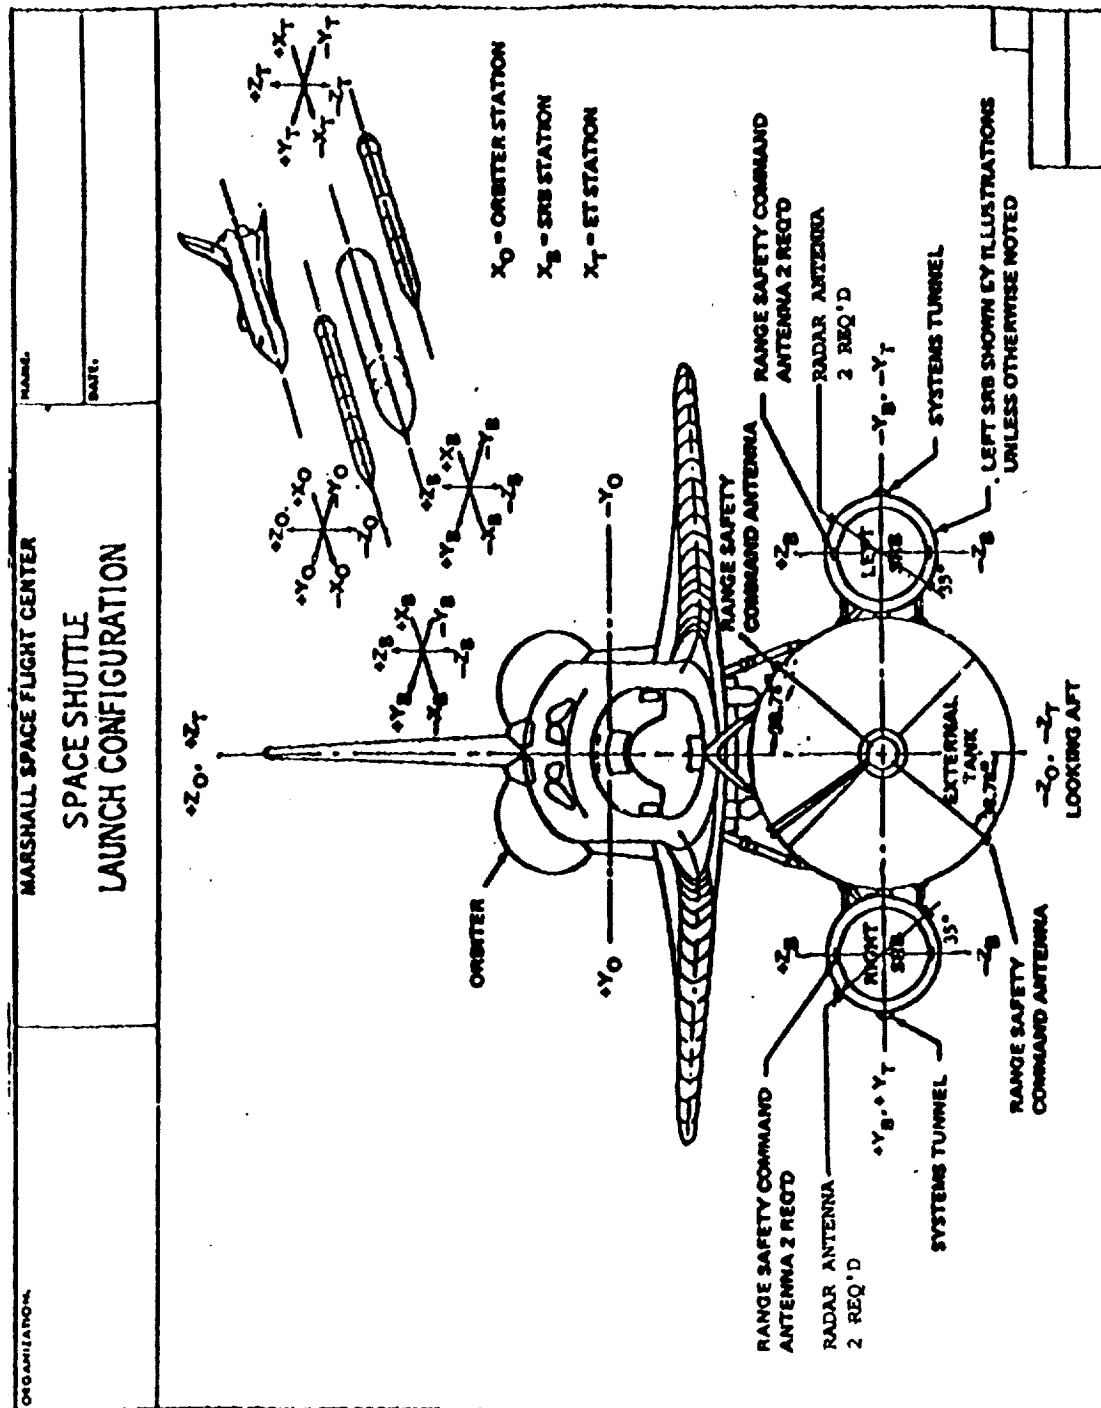Diffraction coefficients have been found for several

Figure 1. Antenna locations amid the cluster.

canonical problems, including plates, wedges, cones, and
elliptic cylinders. Many practical antenna and scattering
problems have been solved with GTD by approximating the
antenna or scatterer by one or more canonical geometries.
Since the scattered field is obtained by summing many rays
that can exist from source to observation point, building
a model of a structure from canonical problems is easy,
since induced current interactions between different parts
of the structure do not have to be explicitly computed.

This GTD ray tracing process lends itself well to the
creation of a general purpose code; this was done by Prof.
Ron Marhefka and his associates at the Ohio State
University [7]. The code is named the Numerical
Electromagnetics Code - Basic Scattering Code (NEC-BSC)
and is implemented on the MSFC antenna range Compaq 386/20
personal computer.

The aspect of NEC-BSC that applies to this problem is
its ability to calculate the far field pattern of an
antenna array in the presence of complex structures,
provided the structure can be modeled as a combination of
canonical geometries. In reality, it is possible that many
ray paths exist between the source and observation point;
the code handles only the lower-order paths. For example,
the code will compute direct, singly-reflected, singly-
diffracted, doubly reflected, reflected-diffracted, and
diffracted-reflected rays, but not doubly-diffracted ones.

These limitations in ray tracing can be significant,
but the code does have limited warning capability which
warns the user when a particular mode which is not
calculated may be significant. This was not encountered
during the course of this investigation. We will see that
it does, however, introduce small discontinuities in the
final pattern. This is not important; the theory of GTD
tells us that the ignored modes would simply smooth out
the discontinuity.

It should be stressed that NEC-BSC is, like many other
general purpose electromagnetic codes, sensitive to the
user's understanding of the underlying theory of the code
and of electromagnetic theory in general. This was evident
during this investigation when it was discovered that
compiling NEC-BSC with an optimizing compiler causes

errors in output when a linear source is placed parallel to the axis of a cylinder. A person without proper training using the code would not have noticed the problem and, most likely, would have generated erroneous results. Further comment on this can be found in the Results and Recommendations section.

Much of this effort was devoted to modeling the helix antennas, and is along the lines of that in [3]. Fig. 2a. represents the two antennas mounted on an SRB, with the aperture flush with the cylinder surface. NEC-BSC allows the user to specify an aperture as a source, but it cannot be mounted on a curved surface (Fig. 2b.). This is because the problem of a source mounted on a curved surface is a completely different type of diffraction problem (the "radiation" problem), and the code does not incorporate this diffraction theory.

Apertures are permitted to be mounted on flat plates, however. It seems logical, then, to mount an aperture on a small flat plate placed a small distance above the circular cylinder representing the SRB (the circular cylinder is another canonical problem which the code handles). Unfortunately, this will not work because doubly-diffracted fields are not computed, and thus the cylinder would not be illuminated by the antenna.

Since the actual helix antennas are circularly polarized, our model must be also. Circular polarization can also be obtained by crossed dipoles or crossed slots. It is known that a half-loop and its associated image can produce a field similar to that of a slot mounted on the cylinder surface [3]. Two of these half-loops are shown in Fig. 2d.; to create the other slot would require two more perpendicular to those drawn.

This cannot be trusted, however, because this would place the sources too close to the cylinder. This is because NEC-BSC is based on a high-frequency asymptotic theory and no two objects should ever be closer than one-quarter wavelength apart. This problem could be alleviated by raising the loops one-quarter wavelength off the cylinder surface, as shown in Fig. 2e.

a) helical
   antennas
   in SRB
   cylinder

b) aper**tures**
   on curved
   surfaces not
   permitted

c) double
   diffraction
   not
   calculated

d) half-loops
   too close to
   cylinder
   surface

e) raised
   half-loops
   OK with MOM
   input

f) optimize

Figure 2. Antenna model development.

This is obviously not a physically viable situation. That is irrevelant though, since the code allows wire segments to be placed anywhere with any current magnitude and phase desired. In reality, the currents would interact and redistribute themselves to satisfy boundary conditions, but this input option is intended to allow the results from a method of moments analysis to be used as a source. In other words, any wire segment interaction would have already been included in the method of moments calculation (NEC-BSC cannot perform the current interaction calculation since it is not based on an integral equation approach). So, even though the currents used on the half-loop model are not derived from a method of moments procedure, we can still take advantage of this input option to create our antenna model.

The next step was to adjust the relative phasing, magnitude, and distance from the cylinder of the wire segments in an attempt to obtain a model that matched well with measured data taken at the antenna range. This was somewhat time-consuming, and was done on what was essentially a trial-and-error basis (Fig. 2f.).

To make the measurements at the antenna range, two of the cavity-backed helix antennas were mounted on a 4.5 foot high cylinder having the same diameter as the SRB. Thus, when developing the antenna model, a 4.5 foot high cylinder was assumed. When only one antenna was modeled, some discontinuities were evident on the side opposite the antenna. This is because of the fact that the code has some difficulty dealing with caustics (places where an infinite number of rays intersect). It so happens that the location of the caustic is at the maximum of the second antenna's pattern; fortunately this drowns out the discontinuity and yields an essentially continuous pattern. The final modeled pattern of two antennas mounted on a 4.5 foot high SRB section is given in Fig. 3. The radiation is very close to being circularly polarized.

The measured pattern for the same situation is given in Fig. 4, and both patterns are plotted for comparison purposes in Fig. 5. The calculated and measured patterns agree very well almost everywhere.

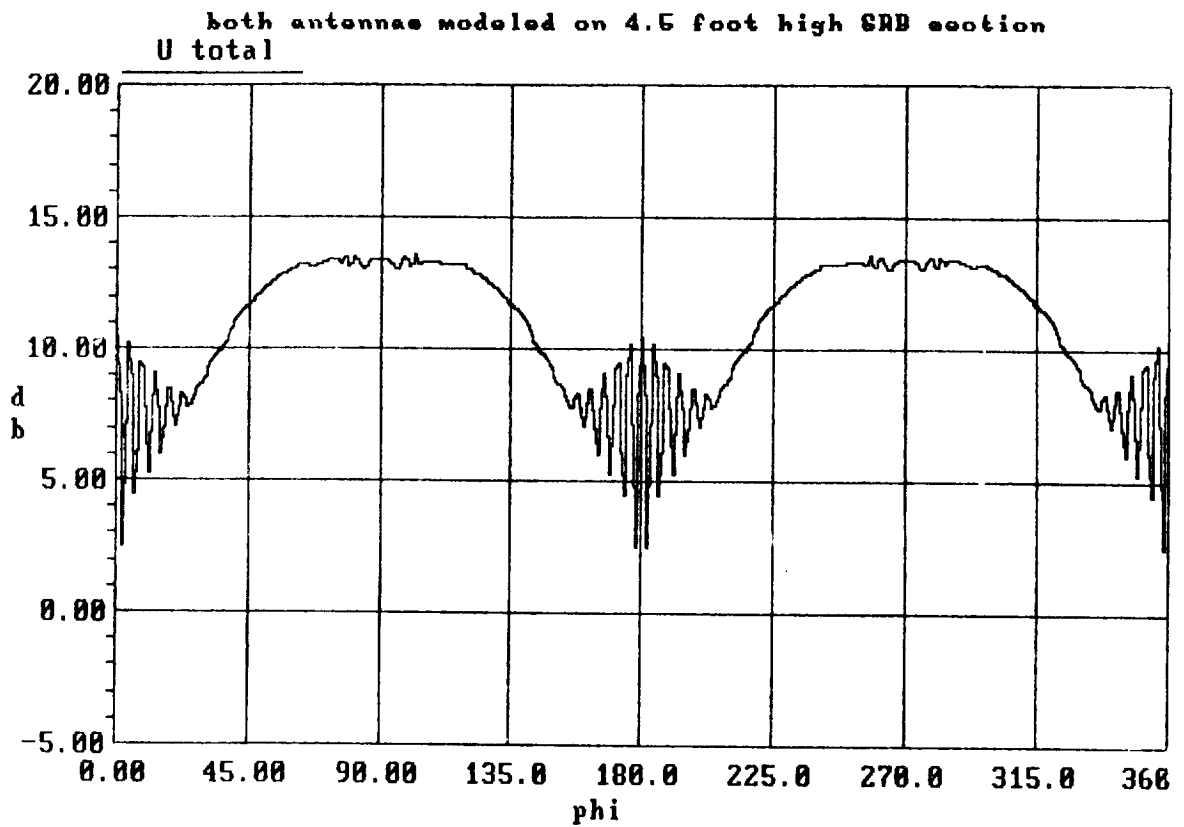both antennas modeled on 4.5 foot high SRB section

Figure 3. Pattern of two antenna models on
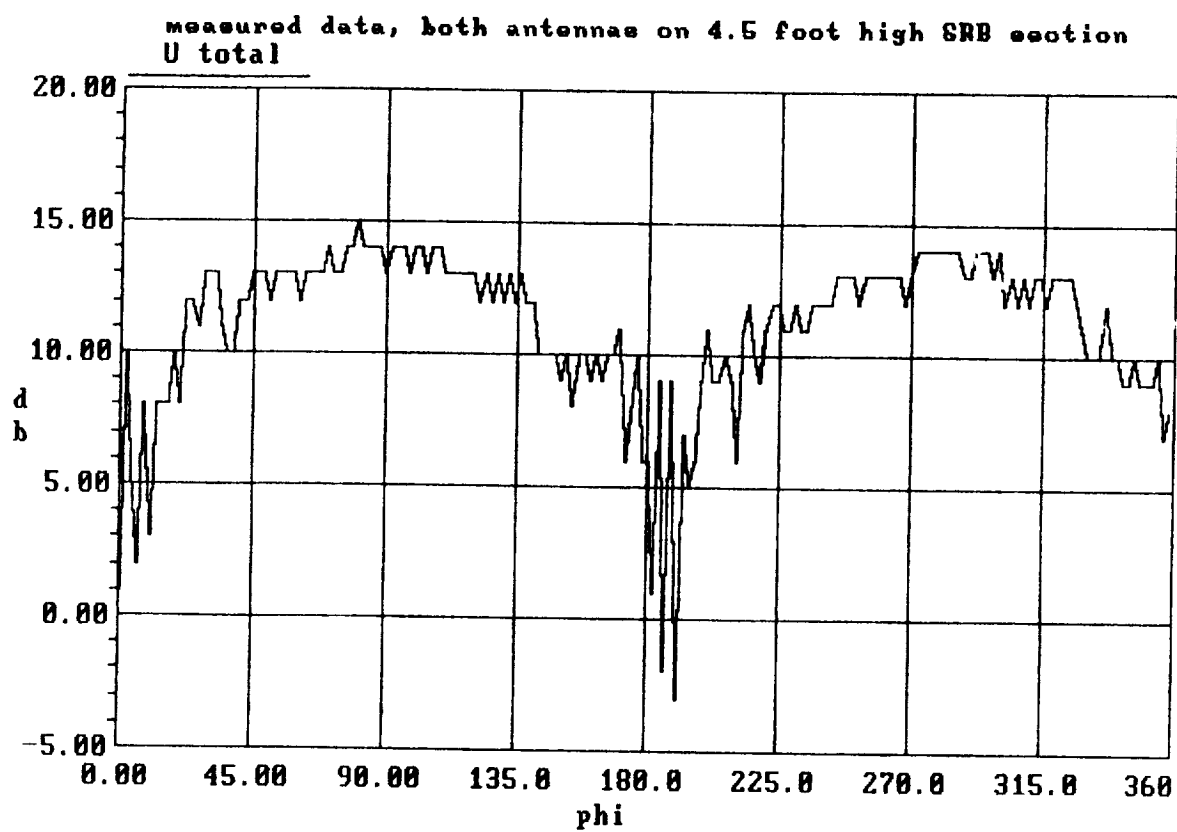   one 4.5 foot high SRB section.

Figure 4. Measurement of roll-plane pattern
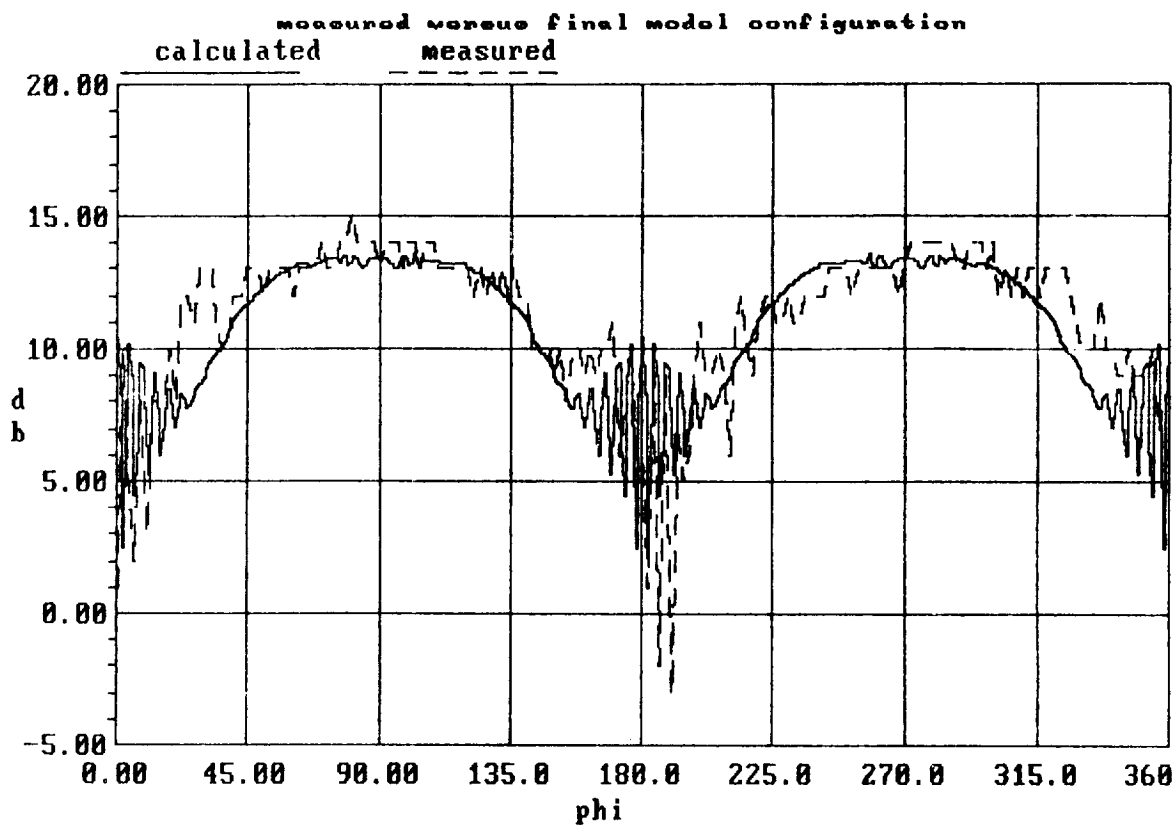of two antennas on 4.5 foot high
SRB section.

Figure 5. Comparison of measured pattern
with calculated pattern.

Now that the two antenna/SRB model is developed, it is
a straightforward matter complete the analysis. Fig. 6
gives the pattern of both SRB's, with the cylinders
rotated by 35 degrees, to coincide with Fig. 1. The
pattern is quite complicated, with very short distances
between adjacent maxima and minima. This is to be
expected, since the scattering centers are very far apart
electrically. To gain more confidence in the pattern at
this point in the development, the pattern of two dipoles
tilted at 35 degrees from the x-axis operating at the same
frequency was calculated and is plotted in Fig. 7. The
periodicity between adjacent maxima and minima is similar
to that of Fig. 6. Dipoles were chosen since they have a
similar pattern to that of the two antenna/SRB model. The
more complicated nature of the pattern of Fig. 6 can be
attributed to multiple cylinder interactions.

Fig. 8 gives the final roll-plane pattern calculation,
obtained by using the input file which created Fig. 6 and
adding cylinders to represent the ET and the cross section
of the orbiter's nose in the roll-plane. Figs. 9 and 10
present the same data in expanded form. Shuttle dimensions
used in creating the input file are taken from [8].

There are some small discontinuities evident in Figs. 9
and 10. These may be due to the basic limitations in the
code's ray tracing procedure or to the fact that
computations can only be done at a minimum of 1 degree
increments. But this pattern is believed to be reasonable
and accurate to within the code's limitations and the
simplifying assumptions.

Due to the 25 page limit on this report, there is no
room for discussion of the details of the input data file.
It is listed as an appendix at the end of this report, and
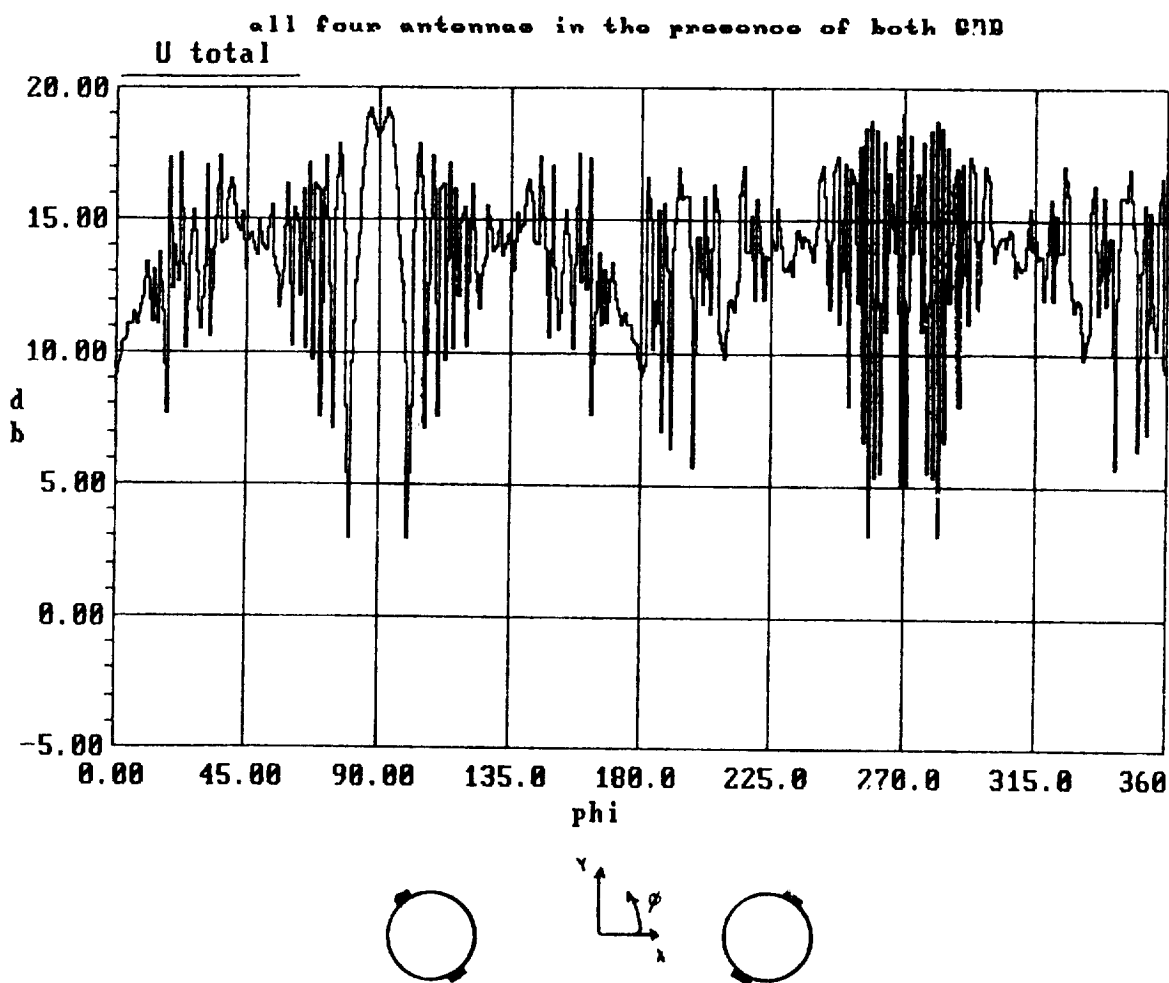may be interpreted with the use of [7].

Figure 6. Pattern of all four antennas in
the presence of both SRB's.
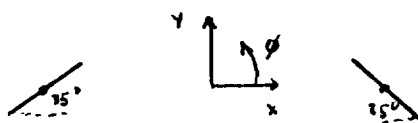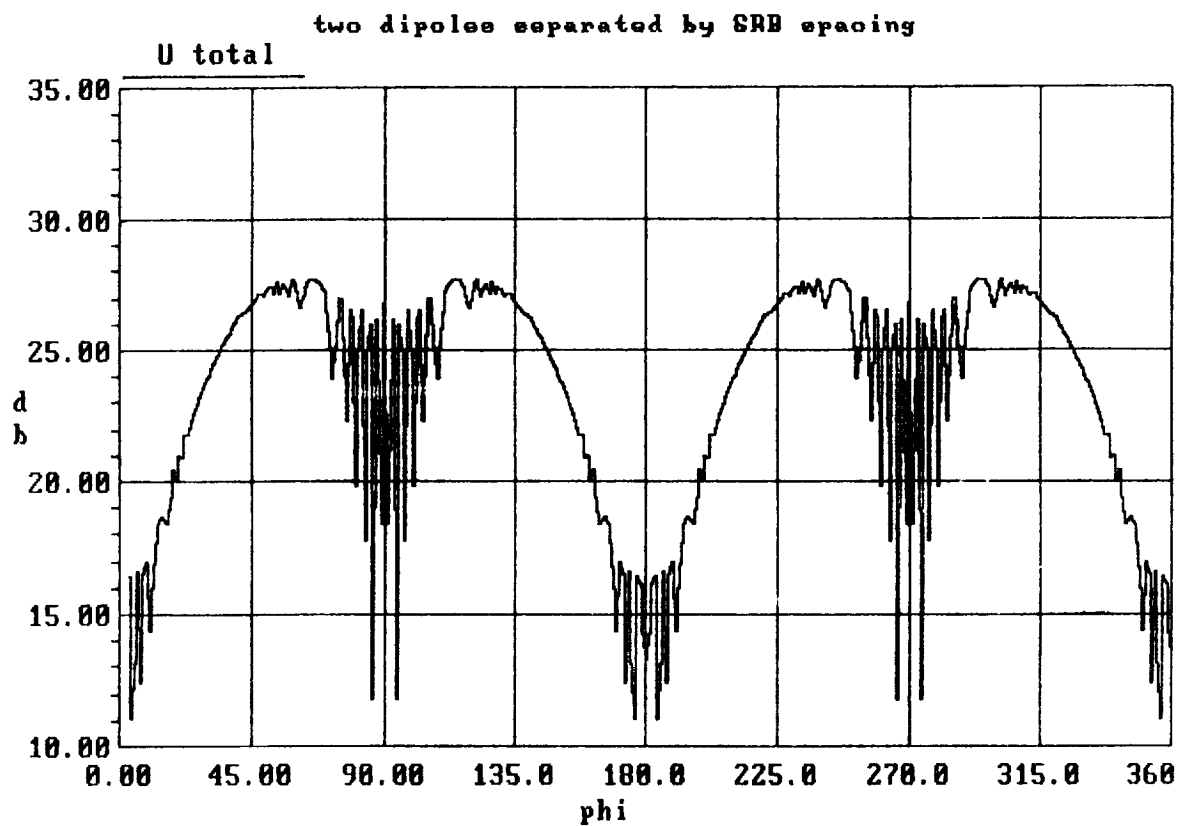
two dipoles separated by SRB spacing

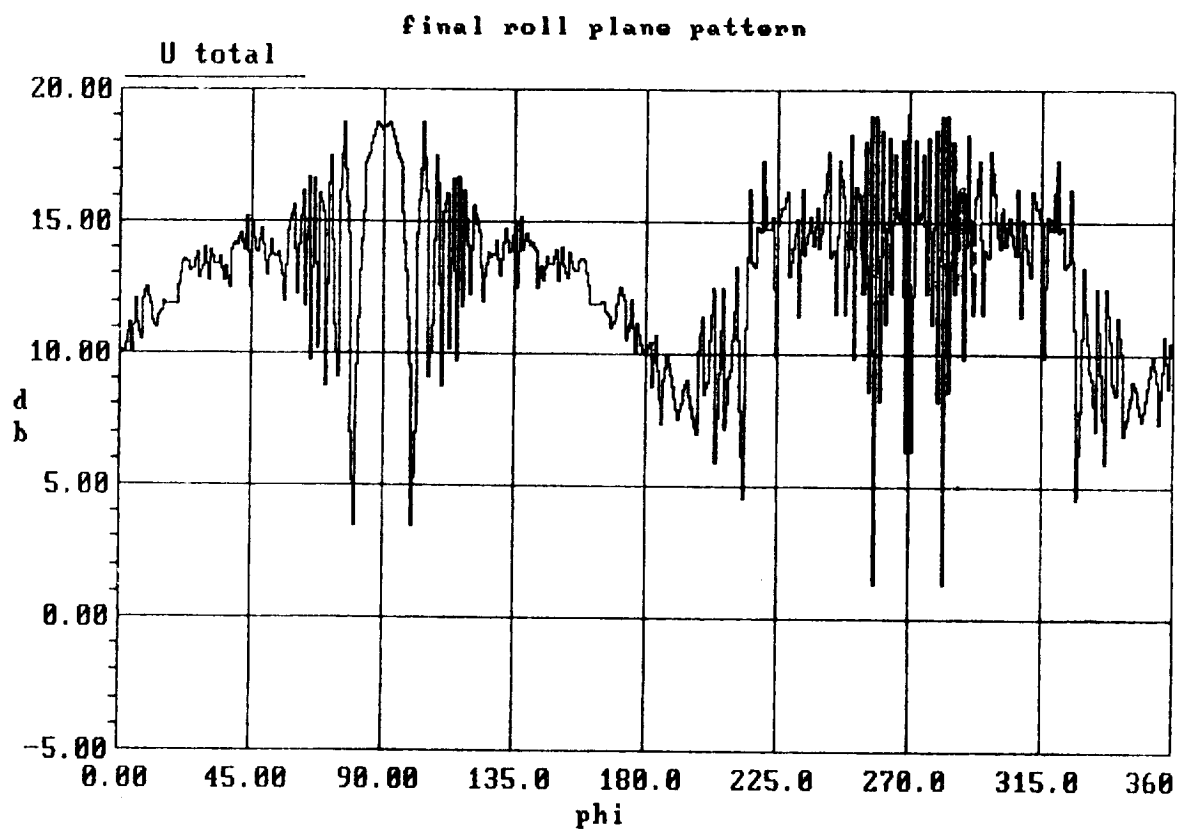Figure 7. Pattern of two dipoles separated
by the distance between the SRB's.

Figure 8. Final result.

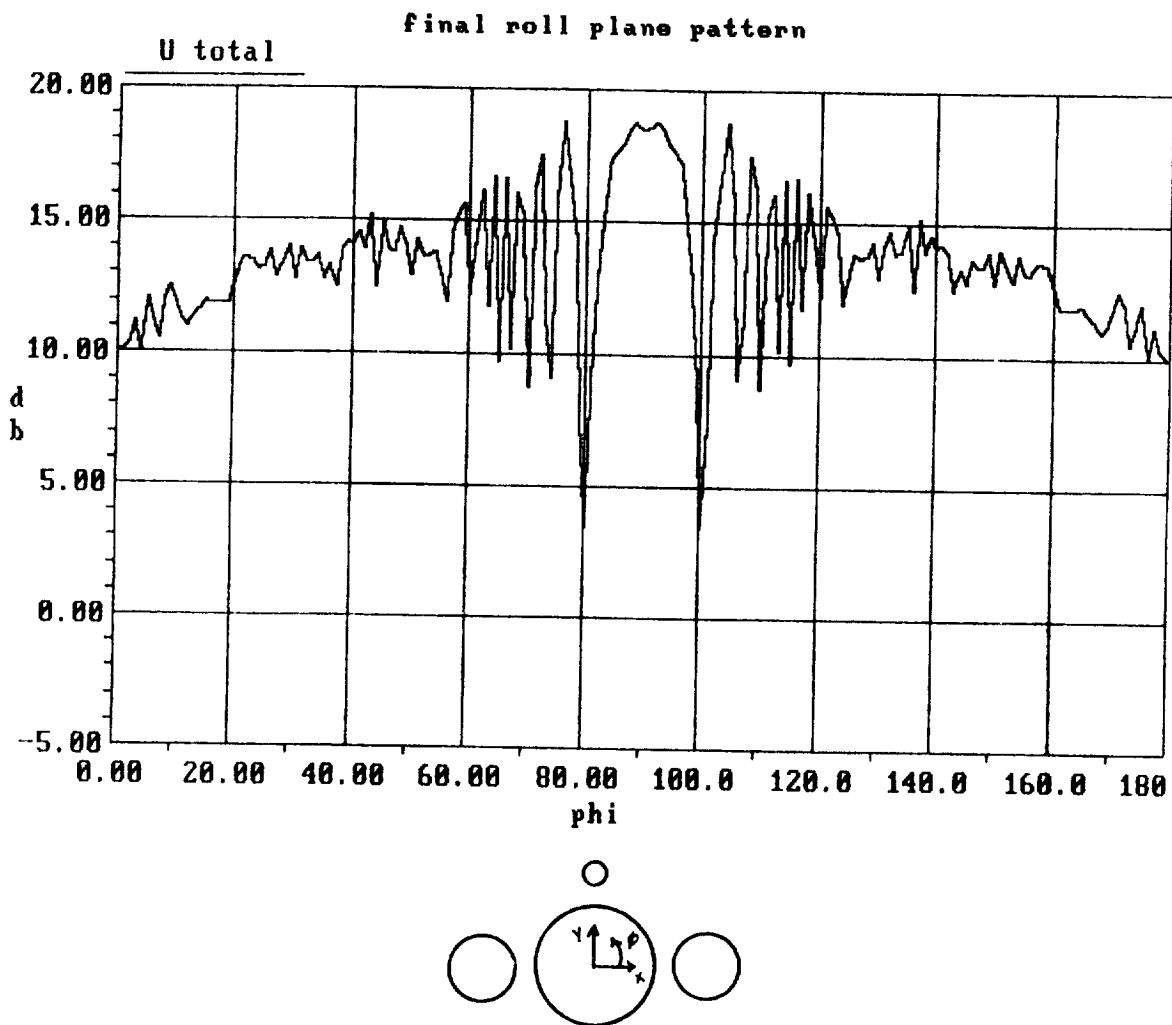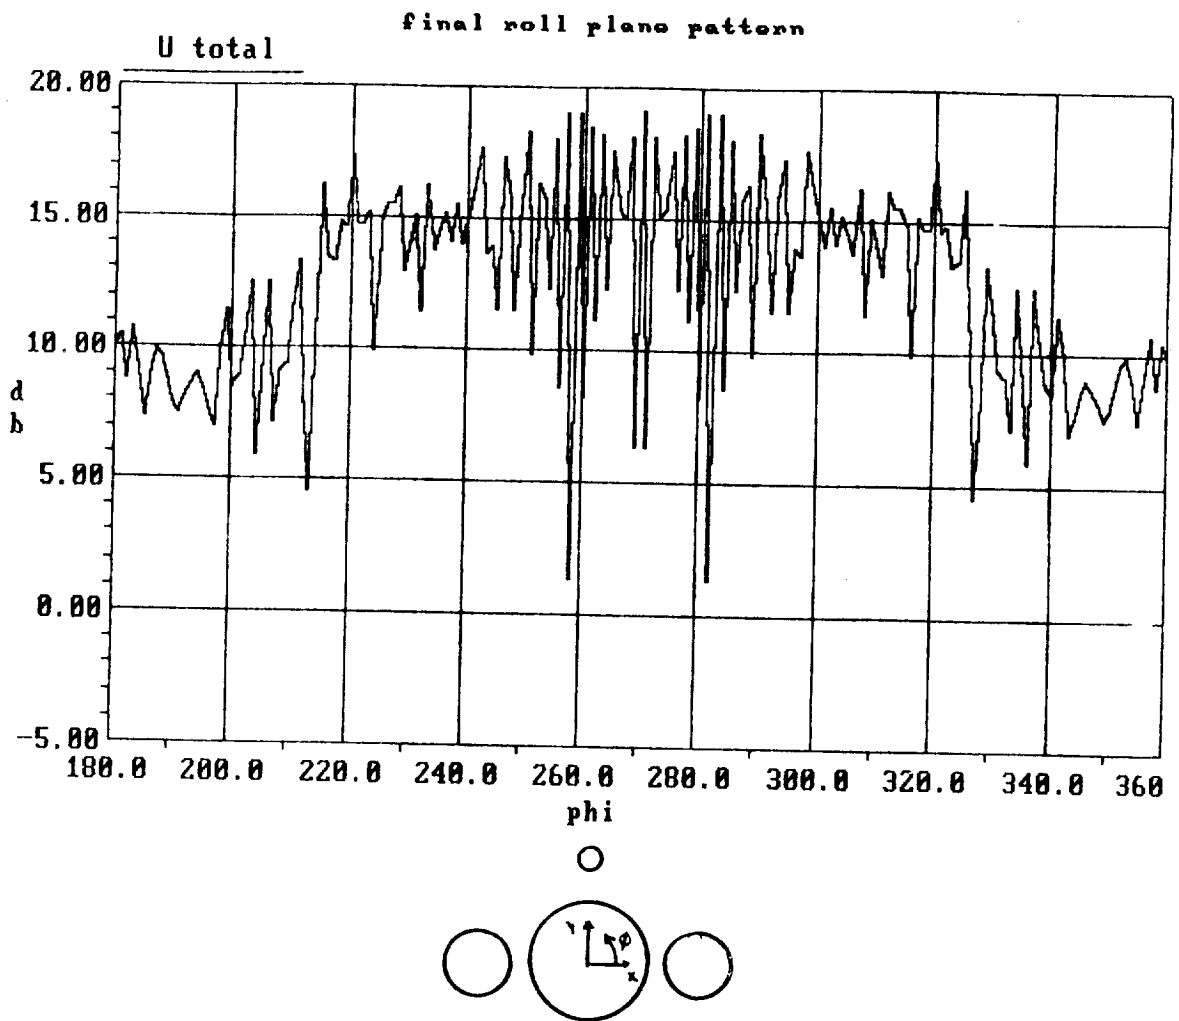Figure 9. Final result - 0° through 180°.

Figure 10. Final result - 180° through 360°.

CONCLUSIONS AND RECOMMENDATIONS

The roll-plane pattern of the radar transponder antennas given in Figs. 8-10 is believed to be reasonable, given the assumptions listed in the Objectives section. The absence of contributions to the roll-plane pattern due to portions of the cluster not in the roll-plane would modify it somewhat, but they are not expected to be significant.

However, if a better estimate of the roll-plane pattern is desired, it is necessary to investigate the effects of the corrugations on the external tank. This problem was examined to some degree [4], but the author stresses that the extent of his investigation was not sufficient to come to a hard conclusion. It appears that the main reason for this was the modeled corrugations were placed on a flat plate, rather than a circular cylinder. This is understandable, since the code used in the study could not handle a problem of this magnitude.

This problem of scattering from electrically large corrugations on a circular cylinder could possibly be solved by a combination of theories used in the examination of frequency selective surfaces (Floquet harmonics [9]) along with the method of moments to solve for induced currents in a periodic cell (one corrugation adjacent to its flat neighbor). This approach was successful in calculation of scattering from a flat array of conducting plates; extension to a cylindrical surface is straightforward but tedious.

Of course, the roll-plane pattern alone is not sufficient to completely describe the performance of the antenna system mounted on the shuttle cluster; a three-dimensional pattern would be necessary. This would not be an easy problem, but is clear that a geometrical optics approach is necessary, and some simplifying approximations would have to be made.

It is also recommended that steps be taken to educate the personnel at the MSFC antenna range on modern techniques to perform analyses such as the one described in this report. There are some very powerful tools available today to aid the electromagnetic engineer perform calculations that he/she could not possibly do

by hand and would otherwise have to rely on crude rule-of-
thumb methods. It must be stressed that purchasing codes
and reading the associated manuals is not enough; proper
understanding of the underlying theory is crucial. The
computing power that already resides at the antenna range
is sufficient; it is recommended that arrangements be made
to have the author present several hands-on seminars to
MSFC personnel to increase what is now a very small
electromagnetic computational capability. This could be
done for a small cost (several thousand dollars).

REFERENCES

[1] Harper, W.,"Transmission Path Obscuration for Radar Transponder Antennas on Shuttle SRB", report ARI/R-89-575, Applied Research, Inc., March 24,1989.

[2] R.J. Marhefka and L. Takacs,"Manual for Obscuration Code with Space Station Applications", NASA Contractor Report 178099 on Grant NSG-1498, The Ohio State University, May 1986.

[3] Harper, W.,"Antenna Pattern Study Final Report", report ARI/R-88-510Z, Applied Research, Inc., July 15, 1988.

[4] Harper, W.,"Electromagnetic Scattering by Shuttle External Tank Surface", report ARI/R-89-573, Applied Research, Inc., February 27,1989.

[5] E.H. Newman,"A User's Manual for the Electromagnetic Surface Patch Code: ESP Version IV", The Ohio State University, August 1988.

[6] C.A. Balanis,"Advanced Engineering Electromagnetics", Wiley, 1989.

[7] R.J. Marhefka and W.D. Burnside, "Numerical Electromagnetic Code - Basic Scattering Code", Technical Report 712242-14, The Ohio State University, December 1982.

[8] NASA Interface Control Document ICD-2-00001, "Shuttle Vehicle Mold Lines and Protuberances"

[9] C.H. Tsao and R. Mittra,"Spectral-Domain Analysis of Frequency Selective Surfaces Comprised of Periodic Arrays of Cross Dipoles and Jerusalem Crosses", IEEE Transactions on Antennas and Propagation, vol. AP-32, no. 5, pp.478-486, May 1984.

```
CM: OUSIM29
CM: ALL CYLINDERS, WITH MULTIPLE INTERACTIONS
CE: LONG CYLINDERS, ROLL PLANE
UN:
1
US:
1
FR:
5.765
CG:
6.36433,0,0
0,0,90,0
1.8293,1.8293
-500,90,500,90
CG:
-6.36433,0,0
0,0,90,0
1.8293,1.8293
-500,90,500,90
CG:
0,0,0
0,0,90,0
4.2304,4.2304
-500,90,500,90
0,6.184,0
0,0,90,0
1.1725,1.1725
-500,90,500,90
SM:
12.5
24
5.3007536,-1.507604,0,.00130095,0,235
5.31141,-1.515068,0,.00130095,0,55
5.306082,-1.511335,0,.0130095,0,145
5.306082,-1.511335,.00650475,.00130095,0,235
5.306082,-1.511335,-.00650475,.00130095,0,55
5.306082,-1.511335,0,.0130095,90,0
7.417254,1.515068,0,.00130095,0,235
7.4279064,1.507604,0,.00130095,0,55
7.422578,1.511335,0,.0130095,0,325
7.422578,1.511335,.00650475,.00130095,0,235
7.422578,1.511335,-.00650475,.00130095,0,55
7.422578,1.511335,0,.0130095,90,0
-5.311406,-1.515068,0,.00130095,0,305
-5.3007536,-1.507604,0,.00130095,0,125
```

```
-5.306082,-1.511335,0,.0130095,0,215
-5.306082,-1.511335,.00650475,.00130095,0,305
-5.306082,-1.511335,-.00650475,.00130095,0,125
-5.306082,-1.511335,0,.0130095,90,0
-7.4279064,1.507604,0,.00130095,0,305
-7.417254,1.515068,0,.00130095,0,125
-7.422578,1.511335,0,.0130095,0,35
-7.422578,1.511335,.00650475,.00130095,0,305
-7.422578,1.511335,-.00650475,.00130095,0,125
-7.422578,1.511335,0,.0130095,90,0
5,0
5,0
1,0
0,5
0,5
0,-1
5,0
5,0
1,0
0,5
0,5
0,1
5,0
5,0
1,0
0,5
0,5
0,-1
5,0
5,0
1,0
0,5
0,5
0,1
PD:
0,0,90,0
T,90
0,360,1
TO:
F,F,F,F
T,T,F
T
T,T,T,T,T,T
T,T,T,T,T
F,F,F,F
XQ:
EN:
```